

Special Order Sign Light



3 Faces Fire Host



Single Faces Fire Host



Extra Length Fire Exit Light



Extra Width Fire Exit Light

Note : Special Order Sign Light available upon request

Remote Lamp / PLL Type

Wall Mounted



CE 120



CE 220



CE 210



CE 110

Ceiling Mounted



CE 309



CE 130



CE 230




PLL LAMP 18/24/36W

Transfer Relay

The Transfer Relay Kit is designed for Maintained Normal 220VAC. From main electricity supply and incoming emergency sources i.e. CU SERIES, HP SERIES, PU SERIES.

Specification

- Mode of Operation : Maintained
- Main Supply : (1) AC 220 Volt, 50 Hz, $\pm 10\%$ - Single Phase
(2) DC 12 / 24 / 220 Volt or AC 220 Volt from CU / HP / PU Series product
- Output : DC 12 / 24 / 220 Volt or AC 220 Volt
- Load : Incandescent, Tungsten Halogen, Dichroic Halogen, Fluorescent, Compact Fluorescent
- Construction : Electro-Galvanized steel sheet 0.9 mm. with epoxy powder and stove enamel coated anti-rust corrosion proof

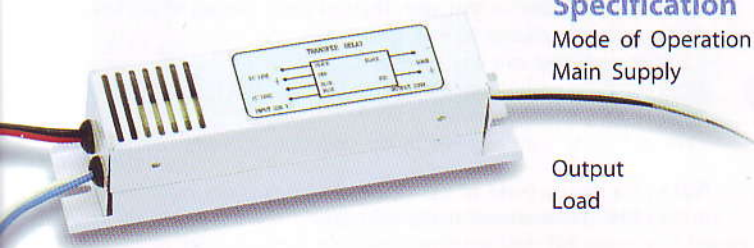

For PU Series

MODEL	FOR PU SERIES	DIMENSION W x L x H (cm)	WEIGHT (Kg.)
TR-P-220	All Model	4 x 17 x 4.7	0.3

For CU Series

MODEL	FOR CU SERIES	DIMENSION W x L x H (cm)	WEIGHT (Kg.)
TR-C-12	CU 12 Volt All Model	4 x 17 x 4.7	0.3
TR-C-24	CU 24 Volt All Model	4 x 17 x 4.7	0.3

For HP Series

MODEL	FOR HP SERIES	DIMENSION W x L x H (cm)	WEIGHT (Kg.)
TR-H-220	All Model	4 x 17 x 4.7	0.3